GE 26" Built-In Heavy-Gauge Galvanized Steel Wall Case (RAB26A)

Official Thru-the-Wall Structural Housing for GE AJ-Series Built-In Air Conditioners

KEY FEATURES & HIGHLIGHTS

- Heavy-Gauge Galvanized Steel Construction with Baked-On Enamel Finish
- Welded Smooth Interior Compound Prevents Rust, Water Intrusion & Structural Sag
- Ships Complete with RAG13A Painted Aluminum Exterior Louvered Grille
- Includes Two Weather-Tight Insulation Panels & Flexible Polymer Gasket Seal
- Universal Fit for All GE 26" Built-In Models (AJCQ08AWJ, AJCQ10AWJ, AJCQ12AXXWA)
- Integrated Weep Holes & Sloped Drain Channel for Proper Exterior Condensate Runoff
- Supports Frame Construction, Concrete Block & Brick Thru-the-Wall Installations
- Pre-Drilled Mounting Flanges & Security Locking Brackets Included



DIMENSIONS & CLEARANCES	
Sleeve Exterior Width	26.0" (26")
Sleeve Exterior Height	15.6" (15 5/8")
Sleeve Exterior Depth	16.9" (16 7/8")
Finished Wall Opening Width	26 1/8"
Finished Wall Opening Height	15 3/4"
Net Weight	20.5 lbs.
Shipping Weight	22.0 lbs.

COMPATIBLE GE CHASSIS MODELS	
8,200 BTU 115V Built-In	GE AJCQ08AWJ
10,000 BTU 115V Built-In	GE AJCQ10AWJ
12,000 BTU 115V Inverter	GE AJCQ12AXXWA
Legacy GE 26" Series	All GE AJ / AZ 26" Chassis

CONSTRUCTION & MATERIALS	
Cabinet Material	Heavy-Gauge Galvanized Steel
Surface Coating	Baked-On Enamel Corrosion Barrier
Interior Seam Finish	Welded & Sealed Compound
Exterior Grille Included	RAG13A Painted Aluminum Grille
Weather Closure Panels	(2) Insulated Interior/Exterior Panels
Perimeter Seal	Flexible Polymer Weather Gasket

INSTALLATION & WARRANTY	
Wall Types Supported	Wood Frame, Concrete, Masonry
Lintel Requirement (Brick/Block)	Steel Angle Lintel Above Opening
Exterior Projection Min	1/2" Past Exterior Siding/Flashing
Manufacturer Warranty	1 Year Limited Replacement

See Page 2 for Official GE Appliances Architectural Framing, Masonry Lintel & Wall Opening Dimensions.

RAB26A

GE Appliances 26" Heavy-Gauge Galvanized Steel Built-In Wall Sleeve & RAG13A Grille

DIMENSIONS (IN INCHES)


INSTALLATION INFORMATION: A finished opening of 26-1/8” x 15-3/4” clear of intrusions is required. Keep clearance of 4” from side walls. Brick veneer or frame walls should have wood studding surrounding case to provide firm anchoring with screws. Case can be fastened directly to brick or block walls with screws sunk in lead expansion shields.

NOTE: Units should be caulked on all four sides of case to the building exterior to assure building integrity.


WALL CASE FOR TENANT OPTION INSTALLATION:
When the air conditioner is offered as a tenant option, this wall case provides protection against outside elements.

RAB26A – includes wall sleeve, exterior grille, steel closure panel and two layers of insulation.


STANDARD WALL SLEEVE RAB26A:
Solid-sided wall case fabricated of galvanized steel with baked enamel finish. Welded areas are coated with a sealing compound to help resist rust and corrosion. Polymer gasket surrounds opening to assure tight weather seal. Aluminum grille **RAG13A** is included. Panels on interior and between case and grille provide weather protection prior to installation of chassis. Provide firm anchoring with screws. Case can be fastened directly to brick or block walls with screws sunk in lead expansion shields.



Frame Construction

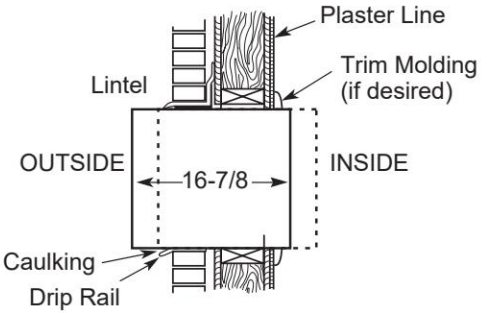

Flexible Mounting Position



Brick Block and Brick Frame Construction

Total volume and shelf area are calculated by the Association of Home Appliance Manufacturers' standards.

LISTED

GE APPLIANCES
a Haier *company*

For answers to your Monogram™, GE Café™, GE Profile™ or GEAppliances product questions, visit our website at **GEAppliances.com** or call GE Answer Center Service, 800.626.2000.